




Layer 3

Layer 2 CPU processing

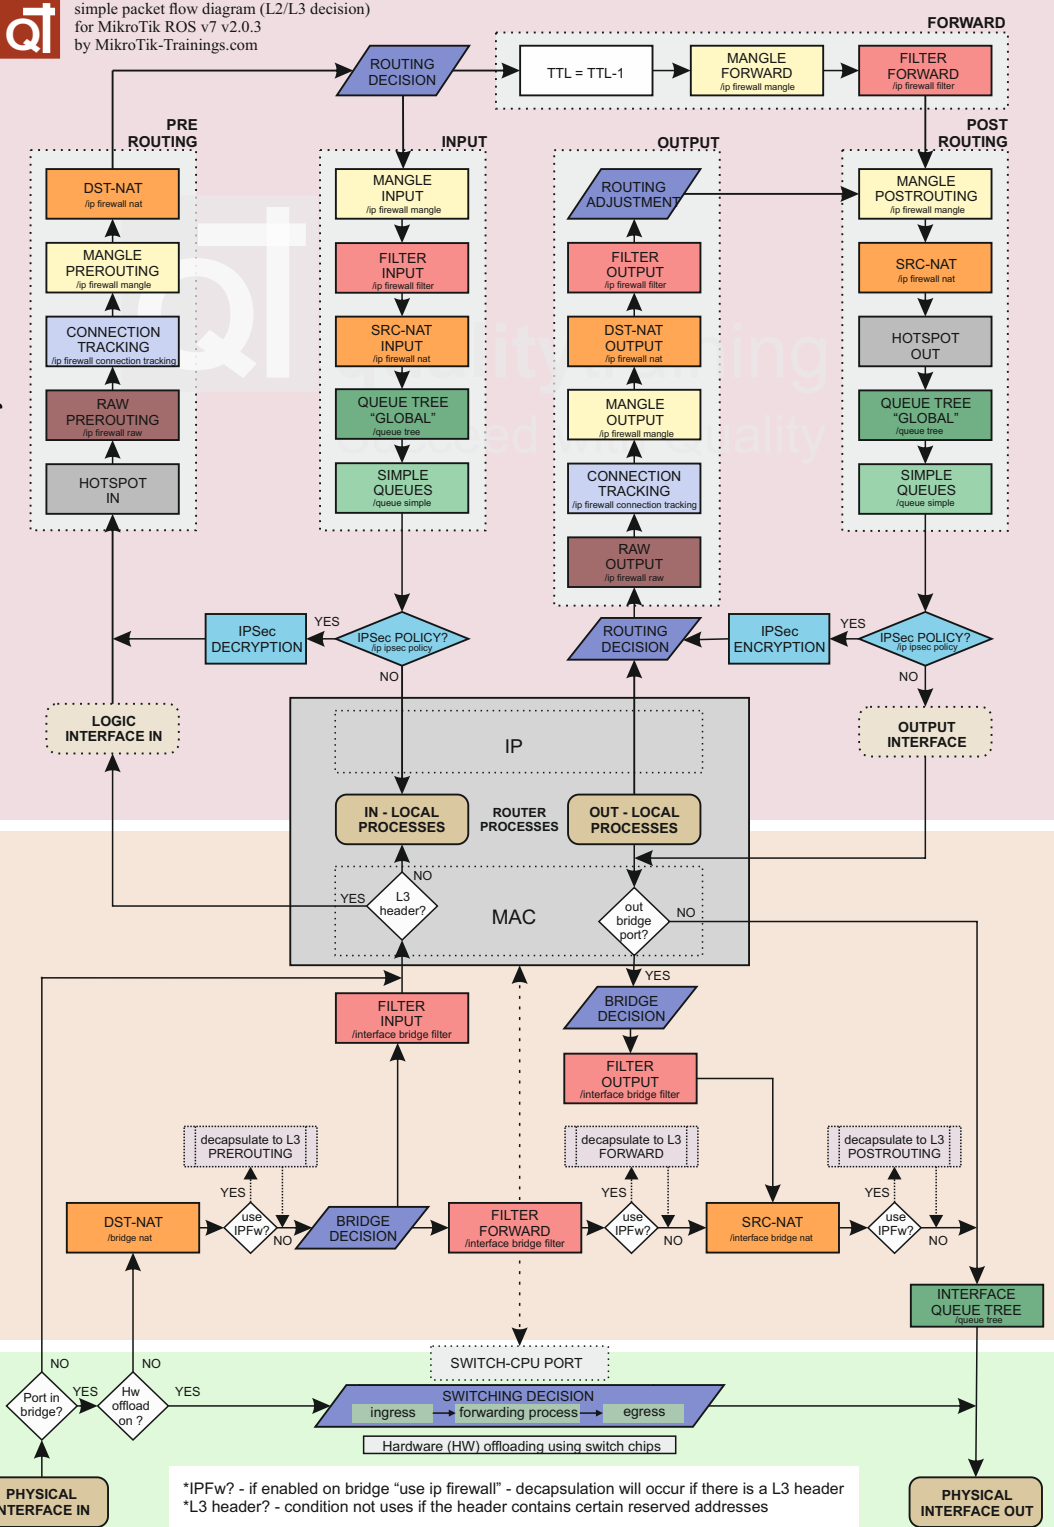

\*IPFW? - if enabled on bridge "use ip firewall" - decapsulation will occur if there is a L3 header  
\*L3 header? - condition not uses if the header contains certain reserved addresses